

# AGRIFLEX+ 354

## IF/VF TECHNOLOGY FOR THE NEXT GENERATION OF ROW CROP FARMERS

- Engineered with Increased Flexion (IF) and Very Increased Flexion (VF) technology
- Provides up to 40% more load capacity than standard tires for higher productivity
- Allows up to a 40% decrease in tire pressure compared to standard tires, preventing soil compaction and field damage
- Unique tread design offers a smooth ride and long, even wear
- High speed capabilities both on and off the road – 40MPH
- Stubble guard compound for long tread life
- Steel belted tread area provides puncture resistance and a more uniform footprint



**LARGE FOOTPRINT, LOW SOIL COMPACTION, GREAT TRACTION. INCREASED PRODUCTIVITY AND REDUCED COSTS.**



# AGRIFLEX+ 354 STEEL BELTED R-1W


OEM FITMENT

The Alliance Agriflex+ 354 has state-of-the-art materials and the steel-belted construction allow VF (Very High Flexion) and IF (Increased Flexion) radial tractor tires to deliver outstanding performance in any conditions. VF tires carry 40% more load on the same inflation pressure as conventional radials, or require 40% less inflation pressure for the same load, to reduce soil compaction. IF tires carry 20% more load on the same inflation pressure as conventional radials, or require 20% less inflation pressure for the same load. (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35410005	VF 380/85R30	14.9R30	146D		TL	59	DW13	55.6	15.5	163.9	24.6	6610	29	40
35400105	VF 420/90R30		153D		TL	62	DW13	59.8	17.7	176.6	26.3	8040	29	40
35400224	VF 320/85R32		139D		TL	56	W11	53.4	12.6	158.1	24.2	7490	23	40
35400028	VF 320/85R34		143D		TL	56	W11	55.7	12.8	166.0	25.3	8410	29	40
35400009	VF 380/85R34	14.9R34	149D		TL	59	DW13	60.0	15.6	177.3	26.7	7160	29	40
35450109	VF 420/85R34		159D		TL	60	DW14L	62.0	16.4	183.5	27.7	9640	35	40
35400017	VF 480/70R34		160D		TL	59	DW16L	62.2	19.5	185.8	28.1	9910	44	40
35400031	VF 320/85R38		155D		TL	56	W11	59.3	12.6	178.1	27.3	8540	52	40
35400002	VF 380/80R38	14.9R38	154D		TL	59	DW13	62.6	15.0	185.4	28.5	8260	35	40
35450004	VF 380/95R38		159D		TL	60	DW13	66.4	15.4	196.7	29.9	9640	35	40
35400018	VF 480/80R42	18.4R42	162D		TL	66	DW16	72.8	19.3	216.1	32.5	10460	29	40
35450046	VF 320/90R46		160D		TL	56	DW10	68.7	12.4	208.3	31.9	9910	52	40
35400053	VF 320/105R46		172D		TL	59	DW11	72.4	12.8	219.8	33.5	13880	70	40
35400016	VF 380/90R46	14.9R46	173D		TL	61	DW13	73.0	15.4	220.3	33.9	14320	64	40
35400062	VF 480/80R46	18.4R46	164D		TL	66	DW16	76.7	19.3	228.6	34.5	11010	29	40
35400033	VF 520/85R46	20.8R46	170D		TL	67	DW18	80.8	20.9	236.7	36.1	13220	23	40
35400050	VF 340/85R48		164D		TL	56	DW12	71.2	13.5	216.1	33.1	11010	58	40
35400047	VF 320/105R50		158D		TL	59	DW11	76.3	12.7	229.8	35.2	8990	40	40
35400133	VF 320/90R50	12.4R50	166D		TL	56	W11	72.8	12.6	221.3	34.0	11700	64	40
35400023	VF 380/90R50		175D		TL	59	W13B	77.0	15.2	230.6	35.4	15200	64	40
35400090	VF 380/105R50		179D		TL	60	DW13	80.8	15.6	243.1	37.0	17070	64	40
35400180	VF 420/95R50		177D		TL	60	DW14	80.8	16.7	241.4	36.7	16090	52	40
35400021	VF 480/80R50	18.4R50	179D		TL	66	DW16	80.7	19.1	240.7	38.7	17100	52	40
35400027	VF 480/95R50		176D		TL	66	DW16	86.1	19.1	257.9	38.7	15640	35	40
35400006	IF 230/115R54		151D		TL	58	W8	76.7	10.1	233.5	35.9	7600	46	40
35400041	IF 270/105R54		158D		TL	58	W10	76.6	11.0	234.2	36.1	9360	58	40
35400036	VF 320/90R54	12.4R54	168D		TL	36	DW11	76.8	12.6	234.0	35.9	12350	64	40
35400056	VF 320/105R54		172D		TL	59	DW11	80.3	12.8	244.6	37.4	13880	64	40
35400029	VF 380/90R54		176D		TL	59	DW13	80.7	15.1	244.1	37.4	15640	64	40
35400205	IF 380/105R54		180D		TL	60	DW13	85.2	15.6	257.2	39.4	17620	75	40

## MINIMIZE SOIL COMPACTION

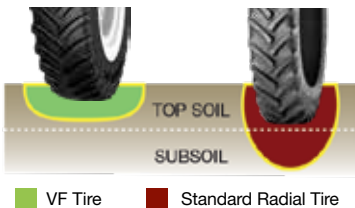

## STEEL BELTED




## MULTI-ANGLED TREAD DESIGN

Directional tread design provides high traction and good steering



- Low rolling resistance
- Superior self-cleaning
- 37° bar for maximum versatility



VISIT [YOKOHAMA-OHT.COM](http://YOKOHAMA-OHT.COM) FOR DETAILED LOAD AND PRESSURE TABLES

Distributor:

Yokohama Off-Highway Tires (YOHT) is a division of The Yokohama Rubber Co., specializing in Agriculture, Forestry, Construction, Industrial, Material Handling, Earthmoving, Mining, Port and other commercial tires. YOHT sells its diverse product range, consisting of over 4,000 SKUs, in over 120 countries through its subsidiaries and channel partners. YOHT products are engineered to be application-specific and purpose-built. For more information visit [www.yokohama-oht.com](http://www.yokohama-oht.com) or email us at [info@yokohama-oht.com](mailto:info@yokohama-oht.com).



Contact Yokohama Off-Highway Tires America, Inc. at (800) 343-3276 or (339) 900-8080 for your nearest Yokohama OHT Tire Dealer.

