

LOADER SOLID TIRES
MORE RUBBER.
DEEPER TREADS.
LONGER LIFE.



GALAXY
APPLICATION SPECIFIC, PURPOSE BUILT.

GALAXY BEEFY BABY SDS

The Galaxy Beefy Baby Severe Duty Solid is the ideal tire to deliver productivity in harsh environments like waste transfer stations, metal recycling, construction, and demolition sites. The SDS offers up to 40% higher carrying capacity than a pneumatic tire and the confidence of being virtually immune to flats. It is available with tire + rim assembly (Lock ring/standard heel type) for quick change of tire.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	587711	31X10-20	10-16.5	Left	Solid Tire	43	7.5	30.8	9.4	7535	N/A	5
	587712	31X10-20	10-16.5	Right	Solid Tire	43	7.5	30.8	9.4	7535	N/A	5
	587713	33X12-20	12-16.5	Left	Solid Tire	51	7.5	32.7	11.3	9725	N/A	5
	587714	33X12-20	12-16.5	Right	Solid Tire	51	7.5	32.7	11.3	9725	N/A	5
	603927	36X14-20	14-17.5	Left	Solid Tire	89	7.5	35.94	13.7	13600	N/A	5
W/O APERTURE TIRE ONLY	587927	36X14-20	14-17.5	Right	Solid Tire	89	7.5	35.94	13.7	13600	N/A	5
	588711	31X10-20	10-16.5	Left	Solid Tire	43	7.5	30.8	9.4	8860	N/A	5
	588712	31X10-20	10-16.5	Right	Solid Tire	43	7.5	30.8	9.4	8860	N/A	5
	588713	33X12-20	12-16.5	Left	Solid Tire	51	7.5	32.7	11.3	11440	N/A	5
W/ APERTURE ASSEMBLY	588714	33X12-20	12-16.5	Right	Solid Tire	51	7.5	32.7	11.3	11440	N/A	5
	594711	31X10-20	10-16.5	Left	8 ON 8	43	7.5	30.8	9.4	7535	N/A	5
	594712	31X10-20	10-16.5	Right	8 ON 8	43	7.5	30.8	9.4	7535	N/A	5
	594713	33X12-20	12-16.5	Left	8 ON 8	51	7.5	32.7	11.3	9725	N/A	5
	594714	33X12-20	12-16.5	Right	8 ON 8	51	7.5	32.7	11.3	9725	N/A	5
	594732	33X12-20	12-16.5	Left	8 ON 10.75	51	7.5	32.7	11.3	9725	N/A	5
	594734	33X12-20	12-16.5	Right	8 ON 10.75	51	7.5	32.7	11.3	9725	N/A	5
	602927	36X14-20	14-17.5	Left	8 ON 8	89	7.5	35.94	13.7	13600	N/A	5
W/O APERTURE ASSEMBLY	596927	36X14-20	14-17.5	Right	8 ON 8	89	7.5	35.94	13.7	13600	N/A	5
	595711	31X10-20	10-16.5	20 x 7.5	8 ON 8	43	7.5	30.8	9.4	8900	N/A	5
	595712	31X10-20	10-16.5	20 x 7.5	8 ON 8	43	7.5	30.8	9.4	8900	N/A	5
	595713	33X12-20	12-16.5	20 x 7.5	8 ON 8	50	7.5	32.7	11.3	11500	N/A	5
	595714	33X12-20	12-16.5	20 x 7.5	8 ON 8	50	7.5	32.7	11.3	11500	N/A	5

GALAXY SUPER SMOOTH SDS

The Galaxy Super Smooth SDS offers smooth flat tread for even wear on hard surfaces and eliminates issues of lug cracking. It eliminates breakdown of equipments or sidewall tearing resulting in maximum equipment up-time. It has steel wire creel beads for improved grip with rim and prevention of rim slippage.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	SIDE	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	590715	31X10-20	10-16.5	NA	Solid Tire	55	7.5	30.7	9.4	7535	N/A	5
	590716	33X12-20	12-16.5	NA	Solid Tire	74	7.5	32.7	11.3	9725	N/A	5
W/O APERTURE TIRE ONLY	591715	31X10-20	10-16.5	NA	Solid Tire	55	7.5	30.7	9.4	7535	N/A	5
	591716	33X12-20	12-16.5	NA	Solid Tire	74	7.5	32.7	11.3	9725	N/A	5
W/ APERTURE ASSEMBLY	597715	31X10-20	10-16.5	NA	8 ON 8	55	7.5	30.7	9.4	7535	N/A	5
	597716	33X12-20	12-16.5	NA	8 ON 8	74	7.5	32.7	11.3	9725	N/A	5
	597709	33x12-20	12-16.5	NA	8 ON 10.75	74	7.5	32.8	11.3	9725	N/A	5
W/O APERTURE ASSEMBLY	598715	31X10-20	10-16.5	NA	8 ON 8	55	7.5	30.7	9.4	4030	N/A	5
	598716	33X12-20	12-16.5	NA	8 ON 8	74	7.5	32.7	11.3	5200	N/A	5

GALAXY HULK SDS WITH APERTURES

The Galaxy Hulk SDS is extra deep sturdy block pattern which has high solid to void pattern with large central block for long tread wear. Its solid construction eliminates punctures, ensuring maximum uptime and steel wire creel beads prevent rim slippage. It is available with tire + rim assembly (Lock ring/standard heel type) for quick change of tire. Hulk SDS gives maximum tread depth available to provide extended tire life with lowest cost of ownership in the most severe application.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	SIDE	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	583717	30X10-16	10-16.5	Left	Solid Tire	75	6	30.2	9.5	8085	N/A	5
	583718	30X10-16	10-16.5	Right	Solid Tire	75	6	30.2	9.5	8085	N/A	5
	583719	33x12-16	12-16.5	Left	Solid Tire	80	8	32.7	10.9	10420	N/A	5
	583720	33x12-16	12-16.5	Right	Solid Tire	80	8	32.7	10.9	10420	N/A	5
W/ APERTURE ASSEMBLY	589717	30X10-16	10-16.5	Left	8 ON 8	75	6	30.2	9.5	8085	N/A	5
	589718	30X10-16	10-16.5	Right	8 ON 8	75	6	30.2	9.5	8085	N/A	5
	589719	33x12-16	12-16.5	Left	8 ON 8	80	8	32.7	10.9	10420	N/A	5
	589720	33x12-16	12-16.5	Right	8 ON 8	80	8	32.7	10.9	10420	N/A	5

WHEEL LOADER

GALAXY SUPER SMOOTH SDS

The Galaxy Super Smooth SDS is specially designed with maximum usable rubber and a smooth pattern. The flat tread radius provides even and reduced wear and low ground pressure. Steel wire creel beads prevent rim slippage, while solid construction eliminates downtime due to punctures. Aperture variant is available for improved ride comfort.



PRODUCT CODE	SIZE	ALT. SIZE	APERTURE	TYPE	WEAR LIMIT	RIM	OD	SW (INCH)	MAX LOAD (LBS)	PSI	MAX SPEED
590466	16.00-25		Y	Solid	271	11.25	58.8	16	26,530	N/A	5
590471	20.5-25		Y	Solid	271	17	59	20.5	29,480	N/A	5
590483	23.5-25		Y	Solid	314	19.5	64	23.5	33,730	N/A	5
597488	26.5-25		Y	Solid	342	22	67.5	26.5	44,250	N/A	5
590491	29.5-25		Y	Solid	380	25	72.5	29.5	52,870	N/A	5

GALAXY LHD 500 SDS

The Galaxy LHD 500 SDS is specially designed for harsh conditions. The strong sidewalls provide stiffness and cut resistance while operating in the harshest conditions. Open shoulder and non-directional tread offers excellent self-cleaning and all around traction on rough terrains.



PRODUCT CODE	SIZE	ALT. SIZE	APERTURE	TYPE	WEAR LIMIT	RIM	OD	SW (INCH)	MAX LOAD (LBS)	PSI	MAX SPEED
581416	14.00-24		Y	Solid	231	10	52.7	14.6	18740	N/A	5
581460	14.00-25		Y	Solid	231	10	52.6	14.6	18740	N/A	5
581461	17.5-25		Y	Solid	231	14	52.6	17.7	21160	N/A	5

GALAXY LHD 510 SDS

The Galaxy LHD 510 SDS has an aggressive S-pattern with continuous shoulder to shoulder groove for superior traction. Steel wire creel beads across the entire cross-section of the tire prevent rim slipping. Specially formulated cut and chip resistance compound provides superior performance in scrap yards. There is a single aperture variant available for improved ride comfort.



PRODUCT CODE	SIZE	ALT. SIZE	APERTURE	TYPE	WEAR LIMIT	RIM	OD	SW (INCH)	MAX LOAD (LBS)	PSI	MAX SPEED
578471	20.5-25		Y	Solid	237	17.00-25	58.8	20.8	26730	N/A	5
578483	23.5-25		Y	Solid	275	19.50-25	64.0	23.5	30580	N/A	5
578488	26.5-25		Y	Solid	304	22.00-25	68.4	27.0	40150	N/A	5
578491	29.5-25		Y	Solid	332	25.00-25	73.0	29.7	47960	N/A	5

GALAXY LHD 510 SDS WEAR PATTERN



0% Wear


25% Wear

40% Wear

60% Wear

SUPERIOR SOLID PERFORMANCE WITH GALAXY SUPER SMOOTH SDS

With increased tread depth, more rubber, and high quality manufacturing, Galaxy solids are the clear choice for scrap yards and transfer stations. In a side by side comparison, the per ton cost of the Galaxy Solid line is lower than the competition. That savings goes right down to the bottom line. Dollar for dollar, Galaxy tires are the SMARTER CHOICE!

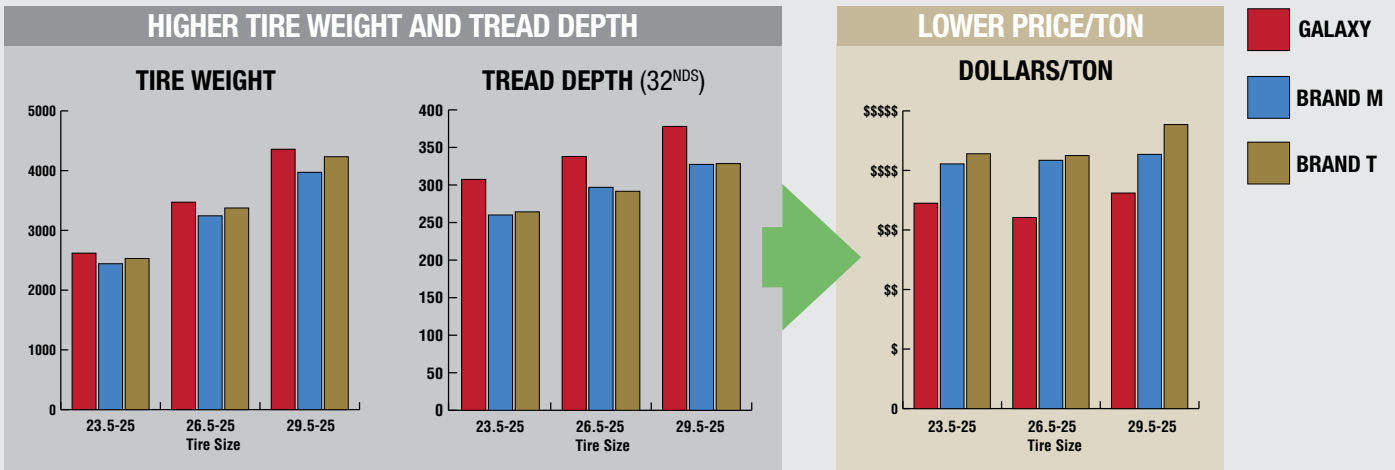

THE HULK SDS ADVANTAGE

The Hulk SDS is a significant technological achievement, and it is all geared toward providing a longer service life and better cost of ownership for our customers. With a 16-inch rim diameter we are able to put **more rubber per tire, providing longer-life and reducing the number of costly tire changeovers.** We designed the unique, solid construction specifically for machinery and severe-duty applications seen in the waste/recycling and scrap-yard industries.

The Hulk SDS tire assembly has a trademark Hulk block pattern with 80/32nds of non-skid depth, one of the **deepest available in the industry.** Ask your sales rep about the Hulk SDS today!

Specs	Beefy Baby SDS	Hulk SDS
Size	33x12-20	33x12-16
Rim	7.50-20	8.00-16
OD (in)	32.75	32.68
SW (in)	11.22	10.91
Weight (lbs)	193	237
NSD (32nds)	51	80
60J (32nds)	93.8	106
Aperture	Single Row	Single Row

Pneumatic Size	12-16.5	12-16.5
NSD (32nds)	28	44

Distributor:

Yokohama Off-Highway Tires (YOHT) is a division of The Yokohama Rubber Co., specializing in Agriculture, Forestry, Construction, Industrial, Material Handling, Earthmoving, Mining, Port and other commercial tires. YOHT sells its diverse product range, consisting of over 4,000 SKUs, in over 120 countries through its subsidiaries and channel partners. YOHT products are engineered to be application-specific and purpose-built. For more information visit www.yokohama-oht.com or email us at info@yokohama-oht.com.



Contact Yokohama Off-Highway Tires America, Inc. at (800) 343-3276 or (339) 900-8080 for your nearest Yokohama OHT Tire Dealer.

[facebook.com/yokohamaohta](https://www.facebook.com/yokohamaohta)

[@yokohamaohta](https://twitter.com/yokohamaohta)

yohta-blog.yokohama-oht.com

[yokohama-oht.com](http://www.yokohama-oht.com)