

# COMPACT UTILITY TIRES HARD-WORKING TIRES FOR THE TOUGHEST TERRAINS



# CHOOSING THE RIGHT BACKHOE LOADER TIRE

With advances in tire technology and the extreme specialization we see among today's construction machinery, the bottom line demands that fleet operators go beyond the last decade's thinking on tire choice. Backhoes are not a one-size fits all solution and tires must be carefully selected that provide the maximum performance and life, and minimum overall cost.



PERFORMANCE (COMPOUND, CONSTRUCTION, LIFE)



Alliance 585



Galaxy Hulk



Alliance 580



Galaxy IND Radial R-4



Galaxy Multi Tough



Galaxy Mighty Trac ND



Galaxy E-Z Rider



Galaxy Super Industrial Lug

LOOSE SURFACE

HARD SURFACE

## SPECIALTY TIRES

TURF



Mighty Mow

RIB-TYPE FRONTS



Workstar

HIGH TRACTION LOOSE SOIL



Marathoner

MULTIUSE & SNOW




Alliance 550

# ALLIANCE 585 INDUSTRIAL RADIAL DESIGNED TO OUTPERFORM THE COMPETITION

Backhoes travel more miles on the road than any other construction machine. That's why the Alliance 585 steel-belted backhoe radial is specifically designed to outperform and drastically outlast typical bias tires that are prone to overheating during long distance trips at higher speeds. The advantages of radial tires over bias are well known, and in situations where bias tires aren't able to provide the traction, footprint, stability, comfort and longevity required, Alliance has an option that gives you all the benefits at an attractive price point.

## UNIQUE TREAD DESIGN



**Large Tread Blocks**  
provide greater ground contact  
ensuring smooth ride



**Multi-Directional Blocks**  
provide superior stability



## ROBUST CONSTRUCTION



**Steel-Belted**  
protects the tire against cuts,  
punctures and other damages



**Reinforced Sidewall**  
safeguards the tire  
against damages



**Deeper Tread**  
with optimal rubber to void ratio  
ensures excellent tire life

## ALLIANCE 585 INDUSTRIAL RADIAL R-4

 RADIAL  STEEL BELTED

The Alliance 585 is a radial backhoe tire specifically designed to provide long tire life and durability where the others fail. Its unique pattern design make it a great choice for both hard and loose surfaces and its steel belts and reinforced sidewall make it resistant to cuts, wear and punctures.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
58500012	265/70R16.5	10R16.5 NHS	122A8/ 122B	TL	29	8.25x16.5	30.4	10.4	90.7	13.9	3616	58	25
58500011	305/70R16.5	12R16.5	132A8/ 132B	TL	29	9.75x16.5	32.7	12.1	97.1	14.8	4806	58	25
58500035	340/80R18	12.5/80R18	143A8/B	TL	36	W11	39.4	13.6	117.1	17.9	6000	58	25
58510746	400/70R18	16.0/70R18	147A8/B	TL	37	13	40.0	15.9	119.1	18.1	6780	58	25
58500002	340/80R20		144A8/B	TL	37	W11	41.4	13.5	123.1	18.6	6170	58	31
58510748	400/70R20	16.0/70R20	149A8/B	TL	38	W13	42.0	15.9	127.4	19.1	7160	58	25
58500001	400/80R24	14.9R24	162A8/B	TL	42	DW13	49.2	15.9	147.7	22.3	8810	58	25
58524800	440/80R24	16.9R24	161A8/B	TL	42	DW14L	51.7	17.4	155.0	23.3	10190	58	25
58520460	460/70R24	17.5LR24	159 A8 159 B	TL	44	DW15L	48.9	18.5	145.8	22.0	9645	58	25
58524220	500/70R24	19.5LR24	164A8	TL	43	DW16L	51.6	19.6	154.3	23.3	11000	58	25
58500005	540/70R24	21LR24	168A88/B	TL	43	W18	53.8	21.3	160.6	23.6	12330	58	31

## ALLIANCE 580 INDUSTRIAL R-4

 RADIAL  STEEL BELTED **OEM FITMENT**

The Alliance 580 provides superior stability under load, bolstered by outstanding traction. Extremely puncture resistant steel-belted package makes this a highly durable and long-lasting tire.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
58000010	280/80R16	11R16	130A8	TL	30	W8	33.5	11.4	99.6	14.1	4190	52	25
58010120	280/80R18	10.5R18	132A8	TL	42	W9	35.6	11.1	105.7	16.2	4400	58	30
58010350	300/75R18		142A8	TL	40	W9	35.7	11.6	106.2	16.5	5840	73	30
58010460	340/80R18	12.5R18	143A8	TL	40	11	39.4	13.8	116.9	17.7	6000	58	30
58010436	280/80R20	10.5R20	133A8/133B	TL	42	W9	37.6	11.1	112.0	17.2	4540	58	30
58010475	340/80R20	12.5R20	139G	TL	40	11	41.4	13.5	122.6	18.8	5360	58	55
58010480	340/80R20	12.5/80R20	144A8	TL	40	11	41.4	13.5	122.6	18.8	6150	58	30
58010484	340/80R20		144A8 / 144B	TL	40	11	41.4	13.5	125.4	18.8	6170	58	30
58015000	380/75R20	14.5R20	148A8/148B	TL	42	W12	42.4	15.0	125.4	19.2	6950	58	30
58010520	400/70R20		156A8	TL	47	13	43.5	15.7	130.2	20.1	8820	68	25
58010748	400/70R20		149A8/149B	TL	47	W13	42.2	16.1	124.7	19.1	7150	58	30
58013100	420/75R20		154A8	TL	45	13	44.8	16.5	132.0	20.2	8250	58	30
58011500	405/70R24		152A8	TL	45	13	46.3	15.8	137.7	21.1	7400	58	30
58024800	440/80R24	16.9R24	161A8B	TL	50	W13L	51.5	17.7	152.2	23.3	10200	58	30
58020800	460/70R24	17.5LR24	159 A8/159 B	TL	48	DW15L	49.2	18.2	145.7	22.3	9650	58	30
58024810	500/70R24	19.5LR24	164A8/164B	TL	50	DW16L	51.5	19.9	152.6	23.4	11010	58	30
58024950	480/80R26		160A8	TL	51	W16L	56.0	19.3	166.9	25.3	9900	46	30
58025300	440/80R28	16.9R28	156A8/156B	TL	50	W14L	55.5	18.1	164.7	25.3	8800	46	30
58024530	500/70R28		164A8/164B	TL	50	W16L	55.6	19.8	164.8	25.3	11000	58	30

## GALAXY MULTI-TOUGH RADIAL

The Galaxy Multi-Tough works well in hard surface applications and job sites. Radial construction gives this tire better traction on the road and longer service hours.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
209211	340/80R18	12.5/80R18	136A8	TL	30	W11	39.4	13.5	115	17.7	4940	46	25
209853	405/70R18		146A8/B	TL	23	W13	40.4	16.2	121.6	18.2	6610	64	30
209854	405/70R20		152A2/143B	TL	23	W13	42.4	16	128.5	19.3	6010	54	30
209855	405/70R24		146A8/B	TL	35	W13	46.4	16	139.8	21.4	6610	54	30
209214	440/80R24	16.9R24	154A8	TL	34	DW14L	51.7	17.7	155.7	23.2	8250	46	25
209215	500/70R24	19.5LR24	157A8	TL	43	DW16L	51.6	19.8	150	23	9100	46	25
209901	480/80R26	18.4R26	160A8	TL	34	DW15L	56.2	18.9	169.1	25.2	9900	46	25
209216	440/80R28	16.9R28	156A8	TL	43	DW14L	55.7	17.4	164	25.2	8800	46	25

## ALLIANCE 550 MULTI-USE



The Alliance 550 provides exceptional traction whatever the terrain; snow, sand, hard surfaces and soft surface alike. Steel belts and a cut- and chip-resistant compound make this tire exceedingly puncture resistant.

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
55000042	250/75R16		120G	TL	20	W8	30.7	10.0	92.2	14.2	3080	65	55
55000035	250/80R16		126A8/123D	TL	22	W8	32.0	10.6	97.2	14.7	3420	64	40
55000040	265/70R16.5	10R16.5	130A2	TL	29	8.25	30.4	10.5	92.3	13.7	4180	58	5
55000012	305/70R16.5	12R16.5	141A5	TL	30	9.75	32.8	12.0	97.2	14.7	6130	58	5
55010470	340/80R18	12.5/80R18	143A8/138D	TL	31	DW11	39.4	13.5	118.2	17.7	6000	58	40
55010405	365/70R18		142A2/135B	TL	31	DW11	38.1	14.0	113.1	17.6	4940	54	30
55001480	400/70R18		147A8/144D	TL	33	W13	40.2	15.9	120.4	18.4	6150	58	40
55000055	405/70R18	16.0/70R18	153A2/141B	TL	33	W13	40.2	15.9	120.4	18.4	5670	54	30
55010535	340/80R20	12.5R20	144A8/140D	TL	31	DW11	41.4	13.5	124.1	18.9	5520	58	40
55001617	360/70R20		129A8/124D	TL	31	DW11	41.4	14.0	122.9	18.6	3520	35	40
55001620	360/80R20		147A8/143D	TL	34	DW11	43.0	14.1	128.5	19.3	6800	58	40
55001510	400/70R20		149B	TL	33	DW13	42.0	15.9	125.2	19.0	7150	58	30
55000060	405/70R20	16.0/70R20	149B	TL	33	DW13	42.4	15.9	126.2	19.1	7150	58	30
55001450	300/80R24		133A8/128D	TL	32	W9	43.0	11.6	127.5	19.8	3860	46	40
55001615	340/80R24		140A8/135D	TL	31	W11	45.4	13.5	135.4	20.8	4800	46	40
55001406	360/80R24	13.6R24	143A8/138D	TL	32	W11	46.6	14.1	139.6	21.3	5200	46	40
55001710	400/80R24	14.9R24	149A8/144D	TL	34	W13	49.2	15.9	145.8	22.0	6170	46	40
55002475	420/65R24		151A8/146D	TL	33	W13	45.6	16.1	137.4	20.7	6600	46	40
55002025	440/80R24	16.9R24	154A8/149D	TL	34	W13L	51.7	17.4	156.1	23.3	7150	46	40
55000025	460/65R24		156A8/151D	TL	34	W15L	47.6	17.9	141.6	21.5	7600	46	40
55000120	460/70R24	17.5LR24	159B	TL	34	W15L	49.2	18.4	149.0	22.4	9650	46	30
55002400	480/65R24		151A8/146D	TL	37	W15L	48.8	18.9	146.9	22.1	6600	46	40
55005410	500/70R24	19.5LR24	164B	TL	36	W16L	51.5	19.9	154.4	23.3	11000	46	30
55005330	540/65R24	21LR24	158A8/154D	TL	39	W18L	51.7	21.3	155.6	23.3	8250	46	40

## GALAXY HULK L-5




The Galaxy Hulk has a unique tread pattern that allows it to operate in severe applications while providing superior self cleaning. The Hulk has a minimum tread depth of 44/32nds and a lug-to-void ratio of 68:32. As a result the Hulk will provide long wear and reduce downtime caused by cuts and punctures. It is also built with special cut and chip resistant compounds for durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
133260	10-16.5		10	TL	44	8.25	31.4	10.2	92	14.4	3500	45	5
133266	12-16.5		12	TL	44	9.75	33	12.1	96	15.1	4220	40	5
133273	33X15.50-16.5		14	TL	44	12	33.1	15.1	100	15.1	4800	35	5
133278	14-17.5		14	TL	46	10.5	36.8	14.1	108	16.8	8550	80	5

## GALAXY JUMBO HULK L-4

The Galaxy Jumbo Hulk has a unique tread pattern that allows it to operate in severe conditions while providing superior self-cleaning characteristics. Because of the deep tread depths and high solid to void ratio, the Hulk L-4 provides extraordinary hours of service and reduces downtime caused due to cuts and punctures. This is a very reliable tire that does not overheat under extensive use on the road.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
202289	12.5/80-18		14	TL	43	9	38	12	111	17	4400	48	25
202432	16.9-24		12	TL	48	W15L	51	16.8	152	23.1	7150	38	25
202440	19.5L-24		14	TL	48	W16L	51.1	19.3	153	23.2	8250	38	25
202443	21L-24		16	TL	50	DW18A	54.3	21	162	24.6	9899	41	25
202723	18.4-26		14	TL	50	W16L	56.2	18.5	165	25.3	9900	42	25
202831	16.9-28		14	TL	50	W15L	55.3	17.3	163	24.9	8550	44	25
202562	16.9-30		14	TL	50	W15L	57.4	17.3	160	24.5	8550	44	25

## GALAXY MIGHTY TRAC ND L-4

The Mighty Trac ND is the all-season, all-surface specialist. It's unique block-type tread gives your skid steer just as much traction and performance in reverse as it does in forward; every aspect of the lug pattern is designed to make sure your wheels aren't spinning.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
148260	10-16.5		10	TL	38	8.25	31.4	10.2	92	14.4	3110	75	25
148266	12-16.5		12	TL	43	9.75	33	12.1	98	15.1	4165	80	25
148378	14-17.5		14	TL	50	10.5	36.3	13.7	108	16.5	5675	80	25
148288	12.5/80-18		12	TL	35	W9x18	38.8	12.2	113.3	17.9	5842	54	25
148440	19.5L-24		14	TL	38	DW16Lx24	51.7	19.5	152.6	23.5	8267	38	25

## GALAXY SUPER INDUSTRIAL LUG R-4

**OEM FITMENT**

The Galaxy Super Industrial Lug is heavier, beefier, and built with more plies than other R-4 tires providing superior strength and longer tread life. Because of its durability and versatility, it can be found as an original equipment choice on some of the worlds most popular equipment.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
201103	25X850-14		6	TL	17	7	25.6	8.1	78	11.8	1320	50	20
201290	12.5/80-18	320/80-18	116A8	TL	33	9	38.8	12.1	115.6	17.5	2756	28	25
201289	12.5/80-18	320/80-18	12 / 134A8	TL	33	9	38.8	12.2	116	17.5	4680	62	25
201294	15-19.5		6	TL	26	11.75	39.9	14.7	120	18.2	4180	30	20
201349	400/70-20	16/70-20	144A8	TL	30	W13	42.3	15.5	127	19.3	6150	46	25
201707	14.9-24		6	TL	33	W13	48.8	14.9	144.8	22.2	4300	24	25
201430	16.9-24		8	TL	33	W15L	51.3	17.1	149	22.9	5840	28	25
201432	16.9-24		12	TL	33	W15L	51.3	17.1	149	22.9	7150	38	25
201435	17.5L-24		12	TL	33	W15L	49.3	17.2	145	22.1	6600	38	25
201440	19.5L-24		14	TL	34	W16L	51.5	20	152	23	8250	38	25
201508	18.4-26	480/80-26	12 / 156A8	TL	36	W16L	57	19.4	166	25.7	8800	37	25
201548	16.9-28	440/80-28	12 / 152A8	TL	34	W15L	55.5	17.3	167	25.3	7850	38	25
201562	16.9-30		14	TL	33	W15L	57.3	16.9	169	25.9	8550	44	25

## GALAXY EZ RIDER R-4

**OEM FITMENT**

The Galaxy EZ Rider provides a smooth ride for the operator and great self-cleaning for constant traction. The rim shield and super sidewall help protect the tire against cuts and snags.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
200707	14.9-24		6	TL	32	W13	48.2	14.6	141.4	21.3	4300	24	25
200426	14.9-24		12	TL	32	W13	48	14.9	144.6	21.9	6400	42	25
200432	16.9-24		12	TL	33	W15L	50.6	17.2	148	22.7	7150	38	25
200434	17.5L-24		10	TL	33	W15L	48.4	17.5	144.3	22.1	6150	32	25
200439	19.5L-24		12	TL	34	W16L	51.7	19.3	155	23.5	7600	34	25
200442	21L-24		12	TL	35	DW18L	53.9	20.9	161	24.4	8550	32	25
200546	16.9-28		10	TL	33	W15L	55.7	17	164	25.1	6800	32	25
200548	16.9-28		12	TL	33	W15L	55.7	17	164	25.1	7600	38	25
200551	21L-28		18	TL	35	DW20	58.2	21	172	26.5	11354	44	25

# MIGHTY TRAC ND

# THE MULTI-SURFACE MASTER

Galaxy has gained worldwide renown for its range of high quality application-specific construction tires. But when you need to conquer a wide range of challenges, the Mighty Trac ND is the tire you've been waiting for.

## NON-DIRECTIONAL TREAD PATTERN

The Mighty Trac ND's unique block-type tread gives your construction equipment just as much traction and performance in reverse as it does in forward; every aspect of the lug pattern is designed to make sure your wheels aren't spinning. From the offset shoulder lugs that give more room for grip and clean out in loose and wet surfaces, to the split center lugs and angled sipes that add more biting edges when the tire is flexed on hard slippery ground, our tire designers built this to be the ultimate multi-use construction tire. Special tread compound, robust sidewall construction and rim protectors to safeguard the tire against external damages make the Mighty Trac ND THE powerhouse performer on any terrain in any season.

### STEPPED SHOULDER LUGS

for superior self cleaning in loose soil applications

### NON-DIRECTIONAL TREAD

for maximum traction in forward or reverse

### LARGE TREAD BLOCKS

for better grip on any surface

### ANGULAR SIPES

for better grip especially applications in snow

### LARGER FOOTPRINT

10% greater than the competitor



## GALAXY MARATHONER R-4

OEM FITMENT

The Galaxy Marathoner delivers the highest traction of any industrial R-4 tire on the market. The Marathoner was specifically designed to provide outstanding wear and to offer great pulling power. It features the Galaxy "Mud Breakers" which are designed to eject mud from the tread area. This combination has made the Marathoner one of the best industrial R-4 tires in its class and the perfect tire for original equipment and aftermarket usage.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
102045	23X850-14		6	TL	14	7JA	23.7	7.8	72	11	1820	59	5
102103	25X850-14		6	TL	17	7JA	25.7	8.2	77	11.9	2150	50	5
102141	27X850-15		6	TL	18	7JA	26.9	8.4	82	12.5	2470	45	5
102259	10-16.5		8	TL	23	8.25	30.4	10.6	92	14.1	3500	45	5
102264	12-16.5		10	TL	26	9.75	32.8	12	98	15	4220	40	5
102274	14-17.5		6	TL	28	10.5	36.3	13.7	106	16.3	4800	30	5
102276	14-17.5		10	TL	28	10.5	36.3	13.7	106	16.3	6800	55	5
102287	12.5/80-18		10	TL	35	9	38.8	12.1	116	17.5	3740	45	25
102294	15-19.5		6	TL	26	11.75	39.9	15.3	118	18.2	6150	30	5
102295	15-19.5		12	TL	26	11.75	39.9	15.3	118	18.2	9100	60	5
102348	43X1600-20		4	TL	27	14	42.2	16.1	128.6	19.5	3080	20	20
102961	12.4-20		10	TL	32	11	40.7	12.4	120.9	18.6	4080	44	25
102744	18.4-24		8	TL	33	W16	53.1	18	159	24.1	6400	23	25

## GALAXY MIGHTY MOW R-3

OEM FITMENT

The Galaxy Mighty Mow is engineered to provide superior flotation resulting in a turf friendly tire that will not damage grass or roots. The Mighty Mow works exceptionally well on equipment for lawns, parks, golf courses, playing fields, and cemeteries.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
135848	23X8.50-12		4	TL	11	7	22.6	8.6	62.3	10.2	1477	35	6
135045	23X8.50-14		6	TL	13	7	23.2	8.1	70	10.7	1430	33	15
135141	27X8.50-15		6	TL	13	7	26.8	8.4	79	12.3	2090	45	20
135135	27X8.50-15		12	TL	13	7	27	8.7	81.3	12.4	2469	45	6
135138	27X10.50-15		4	TL	13	8	27.3	10.2	82	12.7	1475	30	20
135845	29X12.50-15		4	TL	13	10LB	29.2	12.2	86	13.4	1320	20	25
135223	9.5-16		6	TL	19	W8	32.3	9.5	91	14.1	1390	30	25
135245	12.4-16		6	TL	21	W10L	36.3	12.4	108	16.4	1820	24	5
135249	21.5L-16.1SL		6	TL	30	W18	44.5	21.5	125	19.4	4409	16	30
135259	10-16.5		8	TL	18	8.25	30.7	10.4	93	14.2	3500	45	5
135262	12-16.5		4	TL	18	9.75	32.9	12.5	97	15	3220	25	5
135266	12-16.5		12	TL	17	9.75	32.8	12.5	99	15	4189	40	5
135274	14-17.5		6	TL	21	10.5	35.9	13.3	105	16.1	8550	30	5
135278	14-17.5NHS		14	TL	21	10.5	35.9	13.3	105	16.1	4806	29	6
135343	41X14.00-20		4	TL	24	11	41.9	13.8	126	19.1	4080	25	20
135875	44X18.00-20		4	TL	25	14	44.6	18	130	20.2	3525	20	25
135433	17.5L-24		8	TL	25	W15L	47.4	17.6	146	22.2	5360	26	25
135439	19.5L24		12	TL	26	W17	51.7	19.5	155	23.5	5203	29	25

## GALAXY WORKSTAR F-3

OEM FITMENT

The Galaxy WorkStar is specifically engineered to be used on the front of two-wheel-drive backhoes.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
231155	11L-15		10	TL	16	8LB	30.3	10.8	89	13.9	2339	52	25
231230	11L-16		10	TL	15	8	32.4	11	96	14.7	2470	52	25
231231	11L-16		12	TL	15	8	32.4	11	96	14.7	2680	64	25



# CHOOSING THE RIGHT TELEHANDLER/GRADER TIRE

With advances in tire technology and the extreme specialization we see among today's construction machinery, the bottom line demands that fleet operators go beyond the last decade's thinking on tire choice. Telehandlers and graders are not a one-size-fits-all solution and tires must be carefully selected that provide the maximum performance and life, and minimum overall cost.



PERFORMANCE (COMPOUND, CONSTRUCTION, LIFE)



Galaxy MGRS 200



Galaxy Giraffe XLW



Galaxy S-300



Galaxy Giraffe ND



Galaxy SHL



Galaxy MPC





Primex G3000

LOOSE SURFACE

HARD SURFACE

## SPECIALTY TIRES

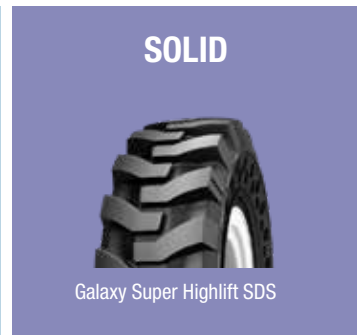

SOLID



Galaxy Super Highlift SDS

## GALAXY MGRS G-2



RADIAL



ALL STEEL

The Galaxy MGRS is manufactured with robust radial construction and special compounds to excel even in the most extreme working conditions. Special compounds ensure protection against lug tearing and heavy wear. The MGRS sidewall protector safeguards against side damages and works as a shock-absorber.



PRODUCT CODE	SIZE	ALT. SIZE	PLY/*	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
272420	14.00R24		*	153A8	TL	34	9.00GR	53.2	14.6	157.8	24.5	8050	54	25
272693	17.5R25		*	153A8	TL	36	14	53.1	17.5	157.8	24.5	8050	44	25
272696	20.5R25		*	161A8	TL	38	25	58.8	20.7	176.7	26.9	10196	44	25

## GALAXY GIRAFFE ND L-3

The Giraffe ND is a low aspect ratio premium telehandler tire which is great for both on- and off-road conditions. Its special non-directional pattern design offers excellent traction on loose surfaces and has high tread depth for increased tire life. The Giraffe ND with its features helps to reduce operating cost and maximize profit. It has a special heat and cut resistant compound.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
288535	370/75-28		14	TL	43	11	50	14.3	148.8	22.8	12000	73	5
288533	400/75-28		16	TL	43	12	51.9	15.6	154.2	23.5	14330	73	5

## GALAXY GIRAFFE XLW G-2/L-2

OEM FITMENT

The Galaxy Giraffe XLW features an all new, multi-purpose design including a wide, flat tread and high turn-up plies that provide stability and make it the optimal tire for Telehandlers. The Giraffe XLW is engineered using a neutral casing design, with solid center blocks for long wear and ride comfort, while its aggressive open shoulder lugs provide excellent traction.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
292408	1300-24		14	TL	32	8TG	50.2	13.5	151	22.9	13200	76	5
292413	1400-24		16	TL	32	8TG	53	14.5	152	23.6	16100	80	5
292451	15.5-25		12	TL	32	12/1.3	50	15.6	143	22.3	12300	58	5
292458	17.5-25		16	TL	34	14/1.5	53.1	17.6	154	23.8	16100	69	5
292468	20.5-25		16	TL	36	17.00/2.5	59	20.8	171	26.5	18200	51	5
292940	16.9-28		12	TT	43	W15	55.5	17.3	169.2	25.7	7826	38	25

## GALAXY S300 G-3

The Galaxy S-300 G-3/L-3 is the latest addition to Galaxy's range of construction tires. The advanced S-pattern promises exceptional traction, excellent stability and durability which ensures maximum productivity. It ensures long tire life especially when operations involve significant movement on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
283409	1300-24		16	TL	36	24	51.0	13.8	139.8	23.7	14300	87	5
283413	1400-24		16	TL	32	24	53.8	14.8	159.8	24.2	16100	80	5
283458	17.5-25		16	TL	37	25	53.1	17.5	158.7	24.0	16100	69	5

## GALAXY MPC G-2/L-2

OEM FITMENT

The Galaxy MPC is designed with a reinforced carcass and high turn-up plies to provide the enhanced lateral stability that telehandlers require to operate effectively. Its aggressive open shoulder lugs deliver exceptional traction in off-road applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
287407	1300-24		12	TL	30	8TG	49.8	12.9	146	22.7	12300	65	5
287411	1400-24		12	TL	31	8TG	52.9	14.4	154	24	13900	62	5
287413	1400-24		16	TL	31	16TG	52.7	14.2	153.9	23.9	16100	80	5
287451	15.5-25		12	TL	31	12.00/1.3	50.3	15.4	148.2	23	12300	58	5
287458	17.5-25		16	TL	31	14.00/1.5	53	17.3	155.1	23.5	16100	69	5
287468	20.5-25		16	TL	35	17.00/2.5	58.8	20.4	175	26.5	18200	51	5
287477	23.5-25		16	TL	40	19.5/2.5	63.7	23.5	188.1	28.5	20950	44	5

## PRIMEX G3000 G-2

OEM FITMENT

The Primex G3000 is designed with a reinforced carcass and high turn-up plies to provide the enhanced lateral stability that telehandlers require to operate effectively. Its aggressive open shoulder lugs deliver exceptional traction in off-road applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
282407	1300-24		12	TL	30	8TG	50.1	13.7	149.2	22.9	12300	65	5
282409	1300-24		16	TL	30	8TG	50.1	13.7	149.2	22.9	14300	87	5
282411	1400-24		12	TL	30	8TG	53.1	14.9	157.9	24.1	13900	62	5
282413	1400-24		16	TL	30	8TG	53.1	14.9	157.9	24.1	16100	80	5

## GALAXY SUPER HIGH LIFT R-1

The Galaxy Super Hi Lift has earned a reputation around the world as a tire that outlasts the competition and provides reliable service. This tire is designed for telescopic handlers and European backhoes used in agricultural applications. These tires provide extra traction in soft soil. In addition, the Rim Shield Protector adds to this tire's durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
203427	15.5/80-24		12	TL	48	W12	49.1	15	147.0	22.1	8250	45	5
203965	15.5/80-24		16	TL	48	W12	49.1	15	147.0	22.1	9900	58	5
203435	17.5L-24		12	TL	50	W15L	51.2	17.6	148.0	22.9	11400	45	5
203437	17.5LR24		150A8	TL	50	W15L	49	17.5	145.0	22.2	7400	44	25

## GALAXY SUPER HIGH LIFT SDS

The Super High Lift SDS is designed for telehandlers working in extreme conditions. The robust construction gives the tire longer life and reduced downtime, ensuring maximum vehicle productivity. Its stepped lug design and deep tread enhances stability and provides excellent traction. The dual aperture design cushions the ride and minimizes heat generation. Special abrasion-resistant compound safeguards the tire against wear and improves tire life.



TYPE	PRODUCT CODE		SIZE	RIM CONFIGURATION	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	MAX LOAD (LBS)	PSI	MAX SPEED
	LEFT	RIGHT										
TIRE ONLY	554355	564355	1300-24	Lip Type	SD	87	8.50V	50.9	13.1	15350	NA	5
TIRE ONLY	554416	564416	1400-24	Lip Type	SD	92	8.50V	52.6	13.9	16980	NA	5
ASSEMBLY	557355	556355	1300-24	10 Bolt - Lip type	SD	87	8.50V	50.9	13.1	15350	NA	5
ASSEMBLY	557416	556416	1400-24	10 Bolt - Lip type	SD	92	8.50V	52.6	13.9	16980	NA	5

# GALAXY SUPER HIGH LIFT SDS SOLID TELEHANDLER TIRE FOR TOUGH OPERATIONS

The Super High Lift SDS is designed for telehandlers working in extreme conditions. The robust two-stage construction gives the tire longer life and reduced downtime, ensuring maximum vehicle productivity. Its stepped lug design and deep tread enhances stability and provides excellent traction. The dual aperture design cushions the ride and minimizes heat generation. Special abrasion-resistant compound safeguards the tire against wear and improves tire life.

## Stepped pattern

Ensures excellent self cleaning and superior stability



## Dual-aperture design

Ensures minimum heat build-up and enhances riding comfort

## Deep tread

Provides long tire life and excellent traction

**ARC**

Abrasion  
resistance  
compound

**VISIT [YOKOHAMA-OHT.COM](http://YOKOHAMA-OHT.COM) FOR DETAILED LOAD AND PRESSURE TABLES**



TRA Code



Speed Rating



On and Off-Road



Off-Road



Steel Belted



Self-Cleaning



Traction



Special Compound

Distributor:

Yokohama Off-Highway Tires (YOHT) is a division of The Yokohama Rubber Co., specializing in Agriculture, Forestry, Construction, Industrial, Material Handling, Earthmoving, Mining, Port and other commercial tires. YOHT sells its diverse product range, consisting of over 4,000 SKUs, in over 120 countries through its subsidiaries and channel partners. YOHT products are engineered to be application-specific and purpose-built. For more information visit [www.yokohama-oht.com](http://www.yokohama-oht.com) or email us at [info@yokohama-oht.com](mailto:info@yokohama-oht.com).

**YOKOHAMA**  
Off-Highway Tires

Contact Yokohama Off-Highway Tires America, Inc. at (800) 343-3276 or (339) 900-8080 for your nearest Yokohama OHT Tire Dealer.



[facebook.com/yokohamaohta](https://facebook.com/yokohamaohta)



[@yokohamaohta](https://twitter.com/@yokohamaohta)



[yohta-blog.yokohama-oht.com](https://yohta-blog.yokohama-oht.com)



[yokohama-oht.com](http://yokohama-oht.com)