



ALLIANCE FARMPRO II RADIAL TRACTOR TIRES FOR VALUE-SMART FARMERS



- R-1W tread design offering 20% deeper lugs for better traction and longer wear
- Multi-angle lug design offers smooth ride, long even wear, and traction in the field



FARMPRO II 846/842 RADIAL R-1W

OEM FITMENT

The Alliance FarmPRO is a modern R-1W designed to be used in a wide array of farm applications, providing up to 25% improvement in fuel economy over standard bias R-1. Versatile multi-angle lug design provides long wear, smooth roading and excellent self cleaning. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
84200010	280/85R20	11.2R20	112A8/109B		TL	48	W10	38.7	11.3	114.7	17.6	2270	23	30
84200022	320/85R20	12.4R20	119A8/116B		TL	50	W11	41.1	13.0	121.8	18.0	2760	23	30
84600014	250/85R24		109A8/B		TL	45	W8	40.8	9.7	121.8	18.7	2270	23	30
84600020	280/85R24	11.2R24	115A8/B		TL	48	W10	42.8	10.7	126.6	19.4	2680	23	30
84600025	320/85R24	12.4R24	122A8/B		TL	51	W10	45.2	13.2	133.8	20.3	3300	23	30
84600101	320/85R24		142A8/142B		TL	51	W10	45.2	13.2	133.8	20.3	5840	67	25
84600035	340/85R24	13.6R24	125A8/B		TL	52	W11	46.5	14.0	137.6	20.9	3640	23	30
84600047	380/85R24	14.9R24	131A8/B		TL	54	W12	49.3	15.2	145.9	21.9	4300	23	30
84600165	420/85R24	16.9R24	137A8/B		TL	57	W14L	51.8	16.5	152.7	23.3	5080	23	30
84601880	380/85R26		127A8/127B		TL	57	W12	50.8	15.0	149.6	23.4	3850	23	25
84600002	420/85R26		135A8/135B		TL	60	W14L	53.9	16.9	160.3	24.6	4800	23	25
84601935	460/85R26		140A8 /140B		TL	64	W15L	56.1	18.3	166.2	25.1	5510	23	25
84600028	250/85R28		112A8/B		TL	46	W8	44.8	9.8	130.9	20.7	2470	23	30
84600021	280/85R28	11.2R28	118A8/B		TL	48	W9	46.7	11.0	138.3	21.2	2910	23	30
84600026	320/85R28	12.4R28	124A8/B		TL	51	W11	49.1	12.8	145.2	22.2	3520	23	30
84600040	340/85R28	13.6R28	127A8/B		TL	51	W11	51.0	14.1	150.9	22.8	3860	23	30
84600070	380/85R28	14.9R28	133A8/B		TL	54	W12	53.2	15.0	157.6	23.8	4540	23	30
84600190	420/85R28	16.9R28	139A8/B		TL	57	W14L	55.9	16.5	164.9	24.8	5360	23	30
84600180	380/85R30	14.9R30	135A8/B		TL	57	W12	55.2	15.0	162.8	24.8	4800	23	30
84600200	420/85R30	16.9R30	140A8/B		TL	57	W14L	57.8	17.0	170.5	25.9	5520	23	30
84600525	420/90R30		147A8/B		TL	59	W13	59.8	16.5	176.3	26.9	5840	23	30
84600140	460/85R30	18.4R30	145A8/B		TL	61	W15L	60.2	18.7	178.3	26.9	6400	23	30
84600032	320/85R32	12.4R32	126A8/B		TL	50	W11	53.4	12.8	158.1	24.6	3740	23	30
84600031	320/85R34		133A8/133B		TL	52	W11	55.4	12.8	165.7	25.6	4540	35	25
84600080	380/85R34	14.9R34	137A8/B		TL	57	W12	59.4	15.0	175.4	26.8	5080	23	30
84600100	420/85R34	16.9R34	142A8/B		TL	57	W15L	62.0	16.5	182.9	28.1	5840	23	30
84600145	460/85R34	18.4R34	147A8/B		TL	57	W16L	64.4	18.9	190.7	28.9	6800	23	30
84600151	460/85R34	18.4R34	157A8/B		TL	57	W16L	64.4	18.9	190.7	28.9	9100	52	30
84600033	320/85R36	12.4R36	128A8/B		TL	50	W11	57.4	12.8	169.9	26.6	39360	23	30
84600045	340/85R36	13.6R36	132A8/B		TL	52	W12	58.9	13.6	174.2	27.1	4400	23	30
84600046	340/85R38	13.6R38	133A8/B		TL	52	W12	60.7	13.6	179.8	28.1	4540	23	30
84600120	380/80R38	14.9R38	142A8/B		TL	57	W12	62.1	14.8	185.9	28.7	5840	35	30
84200121	380/80R38	14.9R38	152A8/B		TL	57	W12	62.1	14.8	185.9	28.7	7850	58	30
84600001	400/75R38		134A8/134B		TL	60	W12	61.8	15.7	186.1	28.8	4670	24	25
84600130	420/85R38	16.9R38	144A8/B		TL	57	W15L	66.1	16.4	195.8	30.3	6150	23	30
84600160	460/85R38	18.4R38	149A8/B		TL	61	W16L	68.5	17.9	202.8	30.8	7150	23	30
84600166	460/85R38	18.4R38	153A8/B		TL	61	W16L	68.5	17.9	202.8	30.8	8050	35	30
84600167	460/85R38		167A8/167B		TL	61	W16L	68.5	17.9	202.8	30.8	12240	64	25
84600300	520/85R38	20.8R38	155A8/B		TL	67	W16A	72.8	20.7	218.3	32.7	8550	23	30
84600301	520/85R38	20.8R38	169A8/B		TL	66	W16A	72.8	20.7	218.3	32.7	12800	52	30
84200038	320/80R42		141A8/B		TL	51	W10	62.2	12.6	184.1	29.1	5680	46	30
84200028	320/90R42		147A8/B		TL	51	W10	64.7	12.6	194.5	30.1	6800	52	30
84600322	480/80R42	18.4R42	151A8/B		TL	66	W16A	72.2	18.9	213.1	33.1	7600	23	30
84600326	480/80R42	18.4R42	169A8/B		TL	64	W16A	72.2	18.9	213.1	33.1	12800	64	30
84600325	520/85R42	20.8R42	157A8/B		TL	68	W16A	76.8	20.3	227.4	35.0	9100	23	30
84600334	520/85R42	20.8R42	169A8/B		TL	68	W16L	76.8	20.3	227.4	35.0	12785	50	30
84200029	320/90R46	12.4R46	148A8		TL	51	W10	68.7	12.6	207.0	32.1	6950	52	30
84200310	380/90R46	14.9R46	165A8/B		TL	59	W13A	73.3	15.0	217.1	33.8	11400	70	30
84600260	480/80R46	18.4R46	158A8/B		TL	64	W16A	77.2	18.9	227.6	35.0	9350	23	30
84600360	520/85R46	20.8R46	158A8/B		TL	68	W16A	80.8	20.3	238.6	36.9	9350	23	30

FARMPRO 845 70 RADIAL R-1W

OEM FITMENT

The Alliance FarmPRO 70 is a modern R-1W design used in a wide variety of farm applications and up to 25% improvement in fuel economy over standard bias R-1. Versatile multi-angle lug design provides long wear, smooth roading and excellent self cleaning. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
84501048	280/70R20		116A8/113B		TL	42	W10	35.9	10.9	106.5	16.3	2540	23	30
84501055	300/70R20		120A8/117B		TL	42	W10	37.6	11.5	111.5	17.1	2830	35	30
84501060	320/70R20		123A8/120B		TL	42	W10	38.8	12.8	114.5	17.5	3080	35	30
84501300	320/70R24		116A8/113B		TL	51	W10	43.1	12.6	127.1	19.6	2540	23	30
84501320	360/70R24		122A8/119B		TL	52	W11	45.2	14.1	133.3	20.6	3000	23	30
84501340	380/70R24		125A8/122B		TL	53	W12	46.9	15.0	138.2	21.2	3300	23	30
84501360	420/70R24		130A8/127B		TL	54	W13	49.1	16.5	144.9	22.1	3860	23	30
84501470	480/70R24		138A8/B		TL	58	W15L	51.8	18.9	151.9	23.3	5200	23	30
84501400	320/70R28		119A8/116B		TL	51	W10	46.9	12.6	138.4	21.5	2760	23	30
84501420	360/70R28		125A8/122B		TL	52	W11	48.8	14.1	144.0	22.5	3300	23	30
84501450	380/70R28		127A8/124B		TL	53	W12	50.9	15.0	150.2	23.2	3520	23	30
84501462	420/70R28		133A8/129B		TL	54	W13	53.1	16.5	156.7	24.1	4080	23	30
84501480	480/70R28		140A8/137B		TL	58	W15L	55.7	18.9	164.3	25.2	5080	23	30
84501505	420/70R30		134A8/131B		TL	54	W13	55.0	16.5	162.4	25.0	4300	23	30
84501535	480/70R30		141A8/138B		TL	58	W15L	58.2	18.9	171.7	26.3	5200	23	30
84501537	480/70R30		150A8/144E		TL	58	W15L	58.2	18.9	171.7	26.3	7400	41	25
84501550	520/70R30		145A8/B		TL	59	W16L	64.6	20.3	190.5	29.3	6950	23	30
84502571	600/70R30		152A8/B		TL	58	DW20B	63.1	24.1	184.2	28.1	7820	24	30
84501541	480/70R34		155A8/155B		TL	59	W15L	62.2	18.9	190.4	28.6	8540	46	25
84501580	520/70R34		148A8/B		TL	59	W16L	64.6	20.3	190.5	29.3	6950	23	30
84502500	480/70R38		145A8/B		TL	58	W15L	66.2	18.9	195.2	30.3	6400	23	30
84502525	520/70R38		150A8/B		TL	59	W16L	69.1	20.3	203.8	31.4	7400	23	30
84502560	580/70R38		155A8/B		TL	62	W18A	72.2	22.7	213.1	32.6	8550	23	30
84502586	710/70R38		172A8/B		TL	74	DW23B	77.1	28.2	227.1	34.6	13900	23	30
84502597	710/70R42		173A8/B		TL	74	DW23B	81.1	28.2	239.4	36.9	14300	23	30




WHAT MAKES THE FARMPRO II SPECIAL?

The Alliance FarmPRO Radial is a highly versatile range that represents the family of modern agricultural radial tires. The multi angle lug design with steep angles at the center enables smooth ride, along with self cleaning characteristics.

In addition, the shallow angle at shoulder provides superior traction. These tires are characterized by reinforced construction in the bead area and have enhanced bead to bead distance to facilitate perfect fit on the rim.

UNIQUE CONSTRUCTION

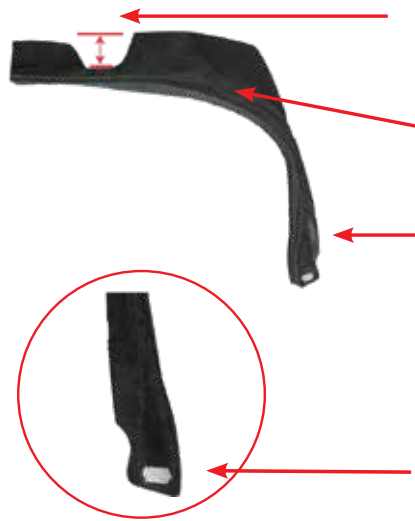

- R-1W TREAD DEPTH**
Ideal for wet soil application
- AGGRESSIVE SHOULDERS**
Excellent traction in the field
- ELASTIC SIDEWALL**
Provides comfortable ride

- STRONG BEAD BUNDLE**
Provides firm seal between tire and rim. Minimum slip.

VISIT YOKOHAMA-OHT.COM FOR DETAILED LOAD AND PRESSURE TABLES

Distributor:

Yokohama Off-Highway Tires (YOHT) is a division of The Yokohama Rubber Co., specializing in Agriculture, Forestry, Construction, Industrial, Material Handling, Earthmoving, Mining, Port and other commercial tires. YOHT sells its diverse product range, consisting of over 4,000 SKUs, in over 120 countries through its subsidiaries and channel partners. YOHT products are engineered to be application-specific and purpose-built. For more information visit www.yokohama-oht.com or email us at info@yokohama-oht.com.



Contact Yokohama Off-Highway Tires America, Inc. at (800) 343-3276 or (339) 900-8080 for your nearest Yokohama OHT Tire Dealer.

facebook.com/yokohamaohta

[@yokohamaohta](https://twitter.com/yokohamaohta)

yohta-blog.yokohama-oht.com

yokohama-oht.com